(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 3 March 2005 (03.03.2005)

PCT

(10) International Publication Number WO 2005/018400 A1

(51) International Patent Classification7: A47G 23/02, A47J 47/00, 47/16

A47K 5/18,

(21) International Application Number:

PCT/NZ2004/000192

(22) International Filing Date: 20 August 2004 (20.08.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

527753 534357 21 August 2003 (21.08.2003) NZ 26 July 2004 (26.07.2004) NZ

(71) Applicant (for all designated States except US): GOR-DON, Craig, Desmond [AU/NZ]; 33a Matai Road, Greenlane, Auckland, 1005 (NZ).

(71) Applicants and


(72) Inventors: NIXON, Kent, Aaron [NZ/NZ]; 93 Arthur Street, Onehunga, Auckland, 1006 (NZ). GORDON, Carissa, Ronelle [NZ/NZ]; 33a Matai Road, Greenlane, Auckland, 1005 (NZ).

(74) Agent: BALDWINS; PO Box 5999, Wellesley Street, Auckland, 1001 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: DRINK CONTAINER HOLDING APPARATUS

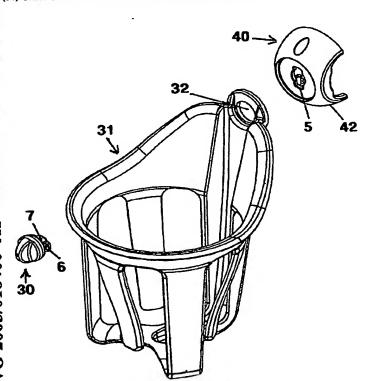

(57) Abstract: ABSTRACT DRINK CONTAINER HOLDING APPARATUS A drink container holding apparatus includes an object attachment device (40) including a holder engagement means (5), and a drink container holder (31) including attachment device engagement means (30) to engage with the holder engagement means (5). The holder engagement means (5) and the attachment device engagement means (30) allow relative angular movement between the object attachment device (40) and the holder (31) in a selected plane. The holder (31) and the object attachment device (40) can be engaged or disengaged by orientating the holder engagement means (5) and the attachment device engagement means (30) in a pre-determined relative angular disposition in the selected plane, and moving the attachment device engagement means (30) and holder engagement means (5) relative to each other in a direction perpendicular to the selected plane. To be accompanied by Figure 4.

WO 2005/018400 A1 HINTHING MINIMUM MIN